
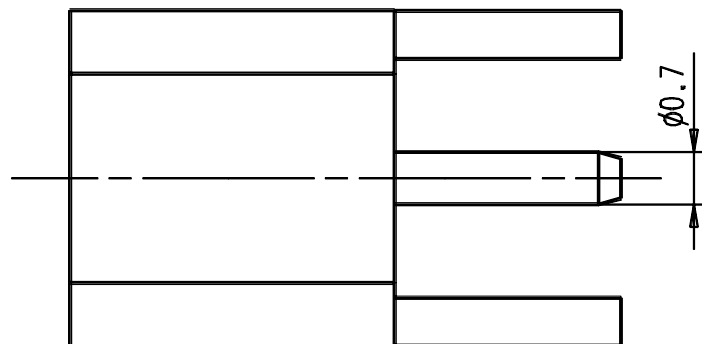
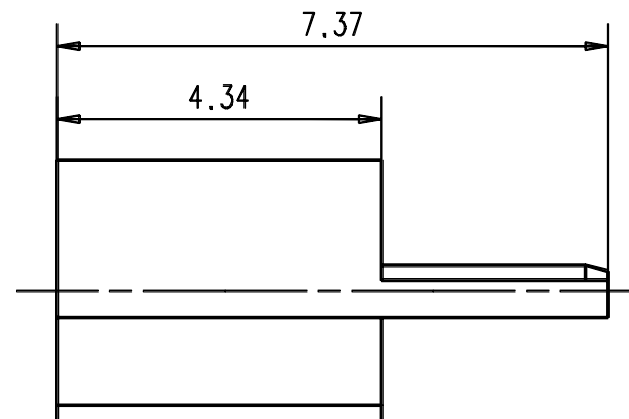


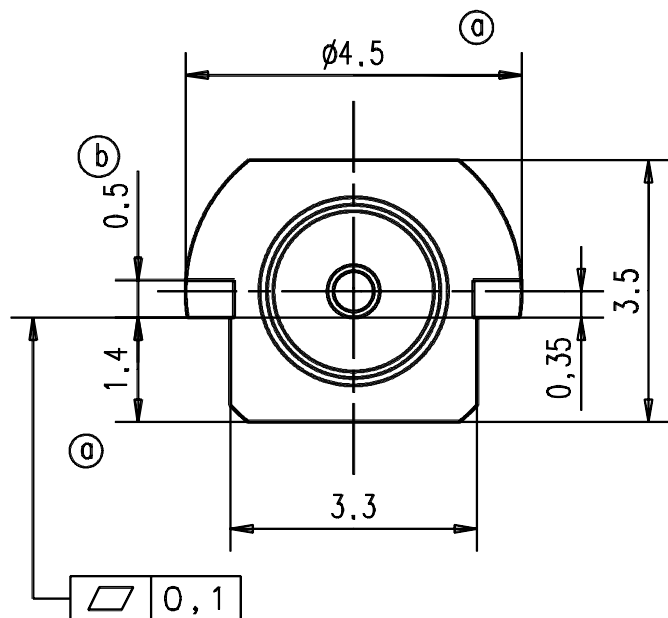


Verpackung:

2000 Stk. im Blistergurt AGK-2592
Gurtdurchmesser 320mm


Packaging:

2000 pcs. in tape and reel AGK-2592
Reel - Diameter 320mm

SMD-Lötflächen/Solderpad layout
M/S 5:1

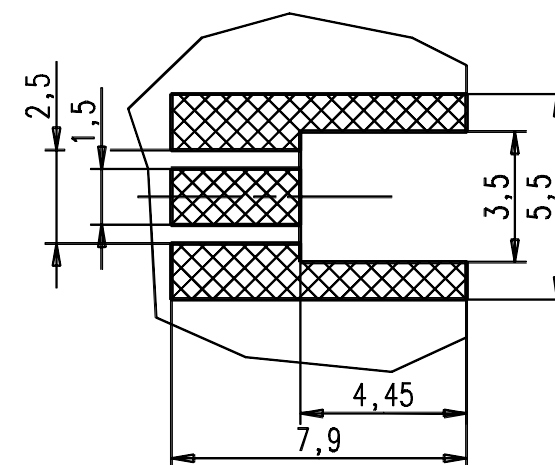

Isometric view
Scale 5x



IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale: 10:1	
							Assembly instruction: Stripping dimension:	
					date	name	Anbaubuchse p.c.b. mount jack	
				generate	21.11.95	Roese		
				checked				
EC_044_06	e	Solderpad layout	08.03.06	I.S.	Norm		1683.09.2610.00'	
310/01	d	Verpackung	14.08.01	I.S.	30700			
253/99	c	0.35 hinzu	21.04.99	RSc				
033/97	b	Ueberarbeitet	21.01.97	Ro.				
Entwurf	a	Ø3.34 in 4.5/Ø1.38 in 1.4	27.11.95	Ro.			Rev. e	
nr.	rev.	alteration	date	name				