


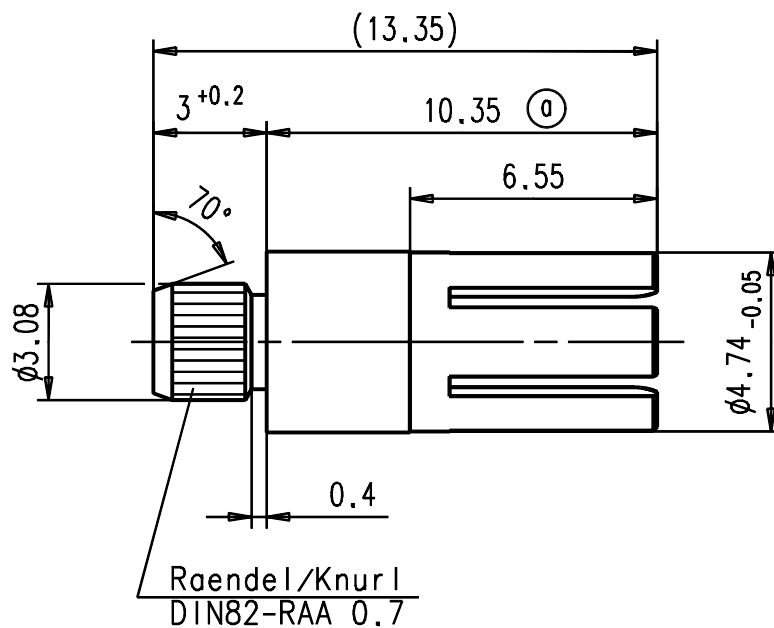

Pruefung / Test

Ziehkraft/ unmating force :


max. 4N

min. 2N

Pruefdorn / Test pin :

Ø3.55-0.01

Empfohlene Montagebohrung
Recommended mounting hole



M1:1

IMS CONNECTOR
SYSTEMS

general tolerance
ISO 2768
mH

scale: 5:1

Assembly instruction:
Stripping dimension:

					generate	date	name	Hochstrombuchse High power insert female	
					checked		Faller		
					Norm				
					30324				
736/01	b	Montageb. hinzu	13.12.01	I.S.			2468.24.2010.00'		Rev.
646/98	a	Mass korrigiert	27.10.98	Fa					b
nr.	rev.	alteration	date	name					