
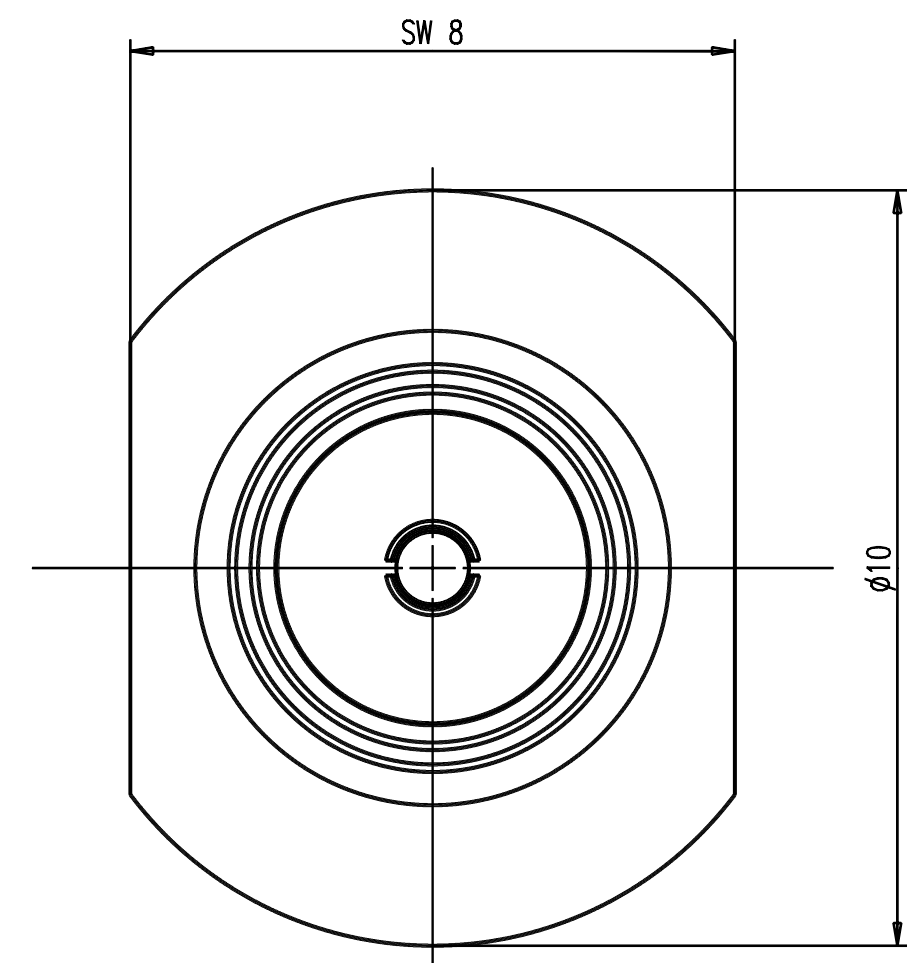


Steckbereich nach IEC 169-15 Grade1
Mating area acc.to IEC 169-15 Grade1


Steckbereich nach DIN72594
Mating area acc.to DIN72594

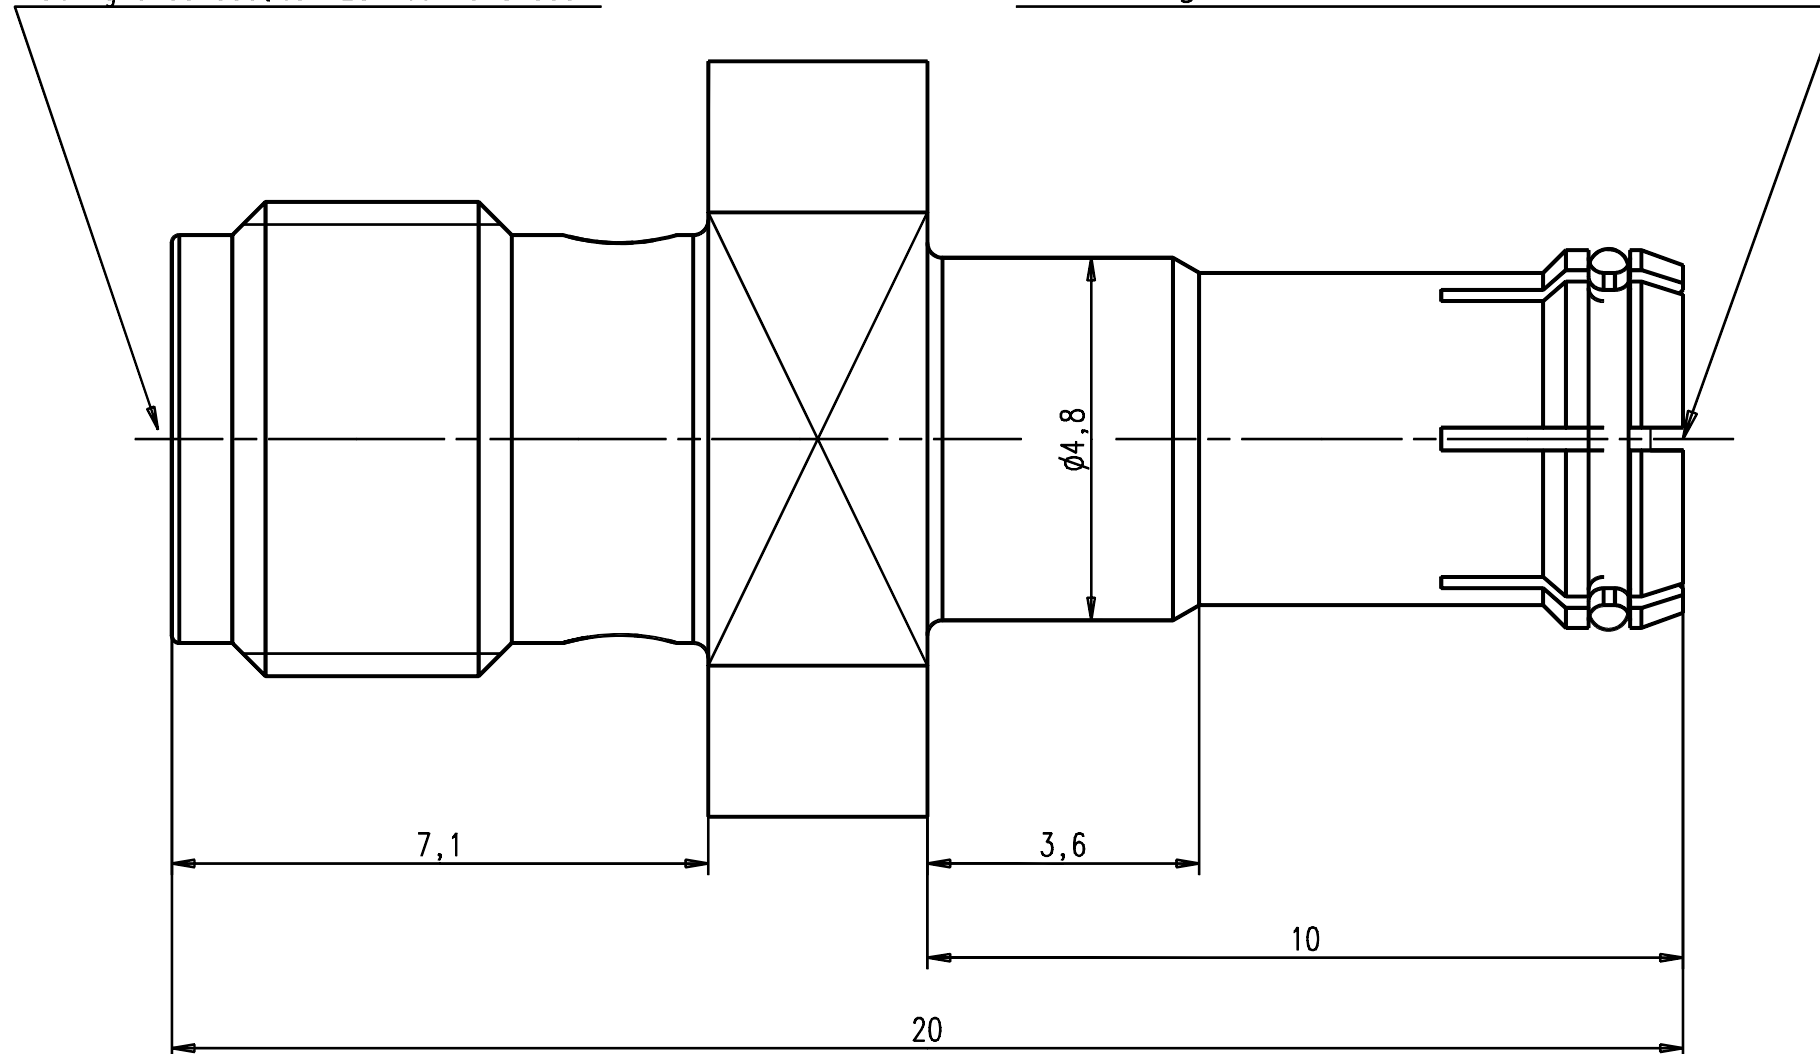


Variable Z= Plating

Part	Material	Variable Z =		
		1	5	9
Centre Contact	CuBe	Au	Au	Au
Outer Contact	CuZn38	Au	Optalloy	Ni
Insulator	PTFE			
spring ring	1.4310			

Variable Z have to be stated within
the drawing number when a order is placed.



IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale:	
							Assembly instruction: Stripping dimension:	
					date	name	SMBA-SMA Testadapter f-f	
					generate	10.07.02 Glatz		
					checked			
					Norm			
					39263			
							3548.SMBA.9910.00Z	
nr.	rev.	alteration	date	name				Rev