





1:1

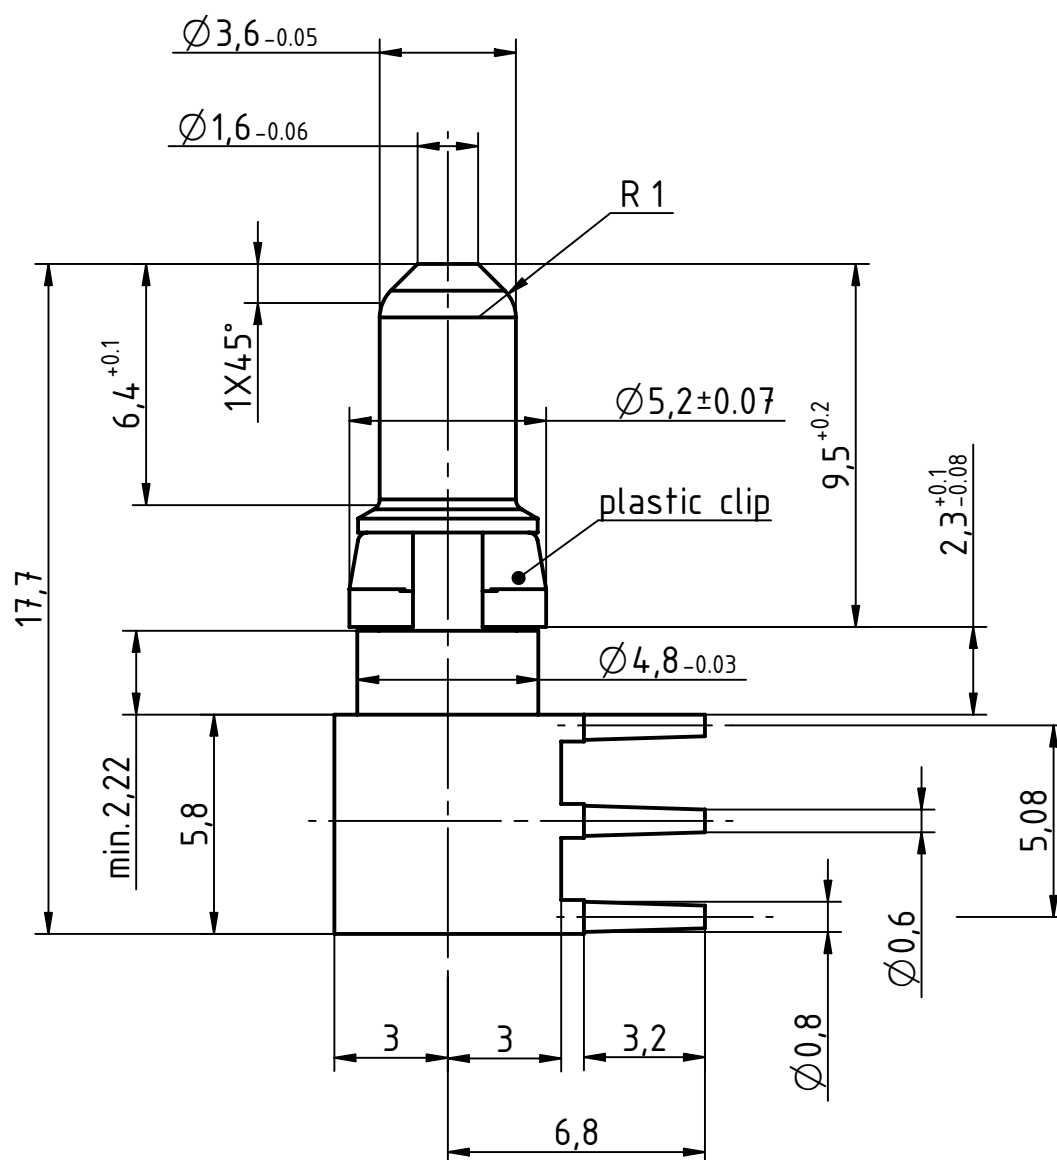

mounting holes

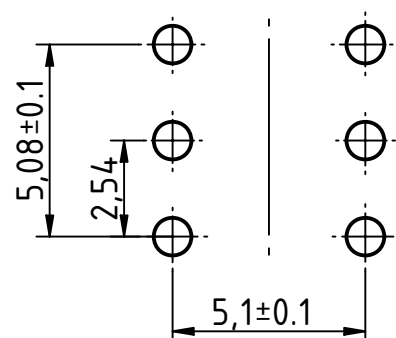

max. constant contact current:
20A
40A (During appropriate design of the pcb)

1.6/ IMS CONNECTOR SYSTEMS					General Tolerance ISO2768 mH		scale:					
							Assembly instruction: Stripping dimension:					
					date	name	High power insert male					
					generate	30.06.09						Auts.Gu
					checked							
					Norm							
									4681.24.1025.40'			
nr.	rev.	alteration	date	name							Rev. A	