


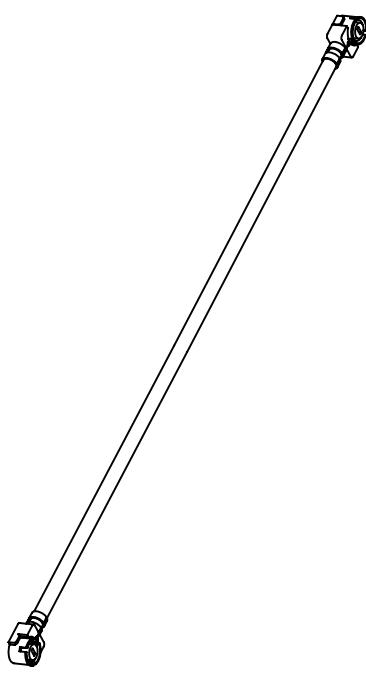


A				B		C		D		E		F		G		H																																																																																																													
																																																																																																																													
<table><tr><th>Pos.</th><th>pcs</th><th>Description</th><th>Type-No./Contents</th><th>Remark</th></tr><tr><td>①</td><td>1</td><td>Connector</td><td></td><td>I-PEX number: 20351-112R-37</td></tr><tr><td>②</td><td>1</td><td>Connector</td><td></td><td>I-PEX number: 20351-112R-37</td></tr><tr><td>③</td><td>1</td><td>Cable</td><td></td><td>look at table (right)</td></tr><tr><td>④</td><td></td><td></td><td></td><td></td></tr><tr><td>⑤</td><td></td><td></td><td></td><td></td></tr><tr><td>⑥</td><td></td><td></td><td></td><td></td></tr><tr><td>⑦</td><td></td><td></td><td></td><td></td></tr><tr><td>⑧</td><td></td><td></td><td></td><td></td></tr></table>										Pos.	pcs	Description	Type-No./Contents	Remark	①	1	Connector		I-PEX number: 20351-112R-37	②	1	Connector		I-PEX number: 20351-112R-37	③	1	Cable		look at table (right)	④					⑤					⑥					⑦					⑧					<table><tr><th>Pos.</th><th>pcs</th><th>Cable -No</th><th>customer part-no.</th><th>Cable- typ</th><th>cable color</th><th>Total length (L)</th></tr><tr><td>③</td><td>1</td><td>K-6403-01</td><td>6506</td><td>OD=Ø1.37</td><td>black</td><td>L=192±2mm</td></tr><tr><td>ⓐ1</td><td></td><td>K-6403-02</td><td></td><td>OD=Ø1.37</td><td>grey</td><td>L=100±2mm</td></tr><tr><td>ⓑ1</td><td></td><td>K-6403-03</td><td></td><td>OD=Ø1.37</td><td>grey</td><td>L=400±2mm</td></tr><tr><td>ⓒ1</td><td></td><td>K-6403-04</td><td></td><td>OD=Ø1.37</td><td>grey</td><td>L=200±8mm</td></tr><tr><td>ⓓ1</td><td></td><td>K-6403-05</td><td></td><td>OD=Ø1.37</td><td>grey</td><td>L=265±5mm</td></tr><tr><td>ⓔ1</td><td></td><td>K-6403-06</td><td></td><td>OD=Ø1.37</td><td>grey</td><td>L=150±5mm</td></tr><tr><td>ⓕ1</td><td></td><td>K-6403-07</td><td></td><td>OD=Ø1.37</td><td>black</td><td>L=193.2±0mm</td></tr><tr><td>ⓖ1</td><td></td><td>K-6403-08</td><td></td><td>OD=Ø1.37</td><td>black</td><td>L=996.6±10mm</td></tr></table>								Pos.	pcs	Cable -No	customer part-no.	Cable- typ	cable color	Total length (L)	③	1	K-6403-01	6506	OD=Ø1.37	black	L=192±2mm	ⓐ1		K-6403-02		OD=Ø1.37	grey	L=100±2mm	ⓑ1		K-6403-03		OD=Ø1.37	grey	L=400±2mm	ⓒ1		K-6403-04		OD=Ø1.37	grey	L=200±8mm	ⓓ1		K-6403-05		OD=Ø1.37	grey	L=265±5mm	ⓔ1		K-6403-06		OD=Ø1.37	grey	L=150±5mm	ⓕ1		K-6403-07		OD=Ø1.37	black	L=193.2±0mm	ⓖ1		K-6403-08		OD=Ø1.37	black	L=996.6±10mm
Pos.	pcs	Description	Type-No./Contents	Remark																																																																																																																									
①	1	Connector		I-PEX number: 20351-112R-37																																																																																																																									
②	1	Connector		I-PEX number: 20351-112R-37																																																																																																																									
③	1	Cable		look at table (right)																																																																																																																									
④																																																																																																																													
⑤																																																																																																																													
⑥																																																																																																																													
⑦																																																																																																																													
⑧																																																																																																																													
Pos.	pcs	Cable -No	customer part-no.	Cable- typ	cable color	Total length (L)																																																																																																																							
③	1	K-6403-01	6506	OD=Ø1.37	black	L=192±2mm																																																																																																																							
ⓐ1		K-6403-02		OD=Ø1.37	grey	L=100±2mm																																																																																																																							
ⓑ1		K-6403-03		OD=Ø1.37	grey	L=400±2mm																																																																																																																							
ⓒ1		K-6403-04		OD=Ø1.37	grey	L=200±8mm																																																																																																																							
ⓓ1		K-6403-05		OD=Ø1.37	grey	L=265±5mm																																																																																																																							
ⓔ1		K-6403-06		OD=Ø1.37	grey	L=150±5mm																																																																																																																							
ⓕ1		K-6403-07		OD=Ø1.37	black	L=193.2±0mm																																																																																																																							
ⓖ1		K-6403-08		OD=Ø1.37	black	L=996.6±10mm																																																																																																																							
<table><tr><th>No. of cable</th><th>Pcs.</th></tr><tr><td></td><td></td></tr></table>										No. of cable	Pcs.																																																																																																																		
No. of cable	Pcs.																																																																																																																												
Stripping dimension										Stripping dimension																																																																																																																			
Pos. ①										Pos. ②																																																																																																																			
Outer: Inner:										Pos. 1 Outer: Inner:																																																																																																																			
Pos. 2 Outer: Inner:										Pos. 2 Outer: Inner:																																																																																																																			
										Frequency range:																																																																																																																			
										VSWR:																																																																																																																			
										Insertion loss:																																																																																																																			
										Operation Temperature Range:																																																																																																																			
										Impedance:																																																																																																																			
										Proof Voltage:																																																																																																																			

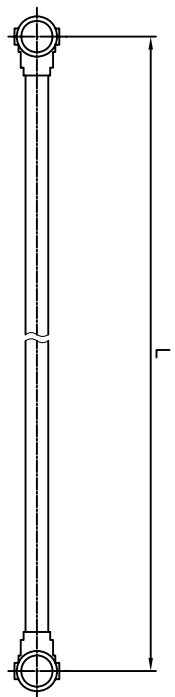

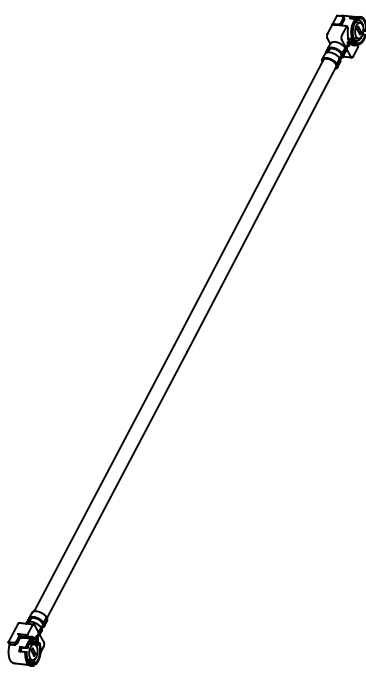

IMS CONNECTOR SYSTEMS				General Tolerance AA-CS-12		scale:	
				Customer: Customer drawing no:			
				date		name	
G Add Item 12.8.20 Nick generate 02.02.09				Dony NI		RF Cable Assembly	
F Add Item 14.12.11 Luther							
E Add Item 24.10.11 Luther							
D Add Item 06.07.11 Luther							
C Add Item 27.06.09 Dony							
B Add Item 03.04.09 Dony						K-6403-XX	
nr. rev. alteration date name						Rev. 6	