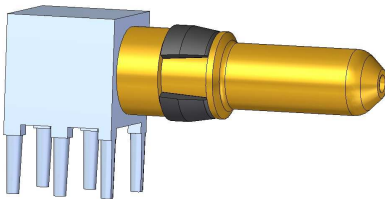


Tel (+49) 7654 901-0
Fax (+49) 7654 901-199
Net: www.imscs.com
E-mail: sales@imscs.com

Part Number: 4682.24.1025.403		Revision:	
Description: High power insert male		Date: 03.07.2009	
		Signature: Pölz	
		Page: 1 of 3	
Design according to:		DIN 41626 part 1	
<u>Electrical characteristics</u>	colored value means: still under test target value		
	Value	Unit	Picture
	Impedance (MIL-C- 39012B)	[Ω]	
	Operating frequency up to	[GHz]	
	DC		
Contact resistance	<1	[mΩ]	Remarks
Contact current (DC)	40	[A]	
Operating voltage		[V]	
Proof voltage		[V]	
<u>Mechanical characteristics</u>		Value	Unit
Engagment force	max. 10	N	Remarks
Disengagment force	min. 4	N	
Mating cycles	>500		

Tel (+49) 7654 901-0
Fax (+49) 7654 901-199
Net: www.imscs.com
E-mail: sales@imscs.com

[illegible]