


- 1) Steckkraft / Engagement force max. 9N
- 2) Abzugskraft / Separation force min. 2.2N

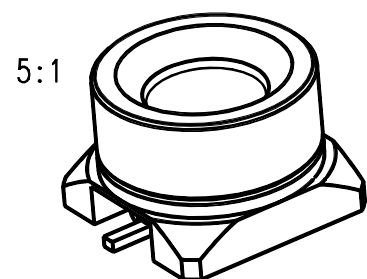

Verpackung:

Blistergurt: AGK-3851
 Stk/Gurt : 950
 Stk/m : 83
 Vorlauf : 0,3 m
 Nachlauf : 0,4 m
 Gurtlaenge : ca. 12,4 m
 Spulenø : 330 mm


Packaging:

Tape and reel: AGK-3851
 parts/reel : 950
 parts/m : 83
 forward run : 0,3 m
 after running: 0,4 m
 lenght : appr. 12,4 m
 reeldiameter : 330 mm

*Steckbereich nach:
 Interface dimension acc. to:

MIL-STD-348A

*smooth bore"

IMS CONNECTOR SYSTEMS					general tolerance		scale: 10:1	
					ISO 2768		Assembly instruction:	
					mH		Stripping dimension:	
					date		SMP-Anbaustecker SMP-Mount. plug	
					name			
					generate 27.01.04			
					checked			
					Norm		3768.SMP.1010.00'	
					42886			
							Rev.	
nr.	rev.	alteration	date	name				