View with preassembled secondary locking
and without inserted SMBA connector

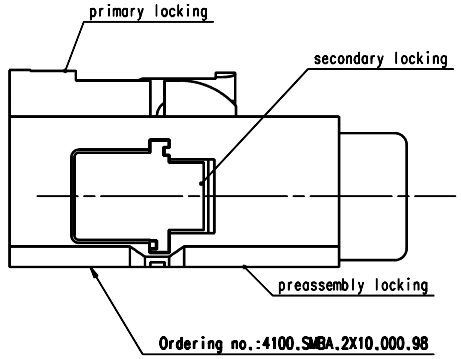

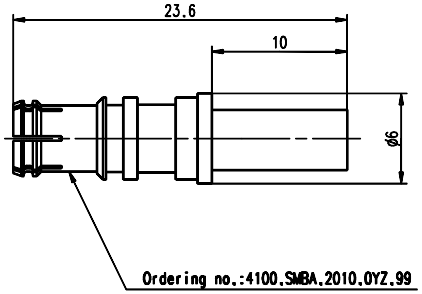

Variable X = Coding

coding X=	A	B	C	D
front view				
colour	deep black	cream white	signal blue	bordeaux violett
coding X=	E	F	G	H
front view				
colour	leaf green	nut brown	blue grey	heather violet
coding X=	I	K	L	M
front view				
colour	beige	curry yellow	carmine red	pastel orange
coding X=	N			
front view				
colour	pastel green			

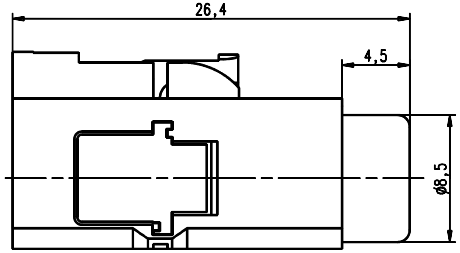

View with inserted SMBA connector

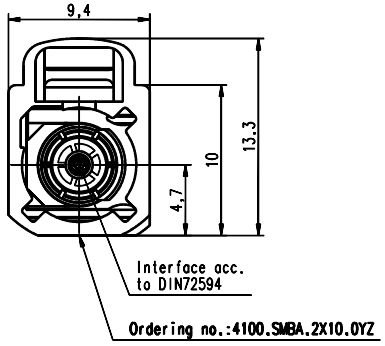

Plating

Part	Material	9
Plastic Housing	PA 6.6	
Centre Socket	bronze	Au
Outer Contact	brass	Ni
Insulator	PE	
Rest	brass	Ni



Variable X have to be stated within
the drawing number when a order is placed.

IMS CONNECTOR SYSTEMS

general tolerance ISO 2768 mH

ISO 2768
0.5-3: ±0,1
3-6: ±0,1
6-30: ±0,2

scale: 4:1

Assembly instruction: see table
Stripping dimension:

	date	name
generate	24.08.06	Renz
checked		
Norm		
47814		

Kabelkuppler
Cable jack

4100.SMBA.2X10.0X9

Rev.

nr.	rev.	alteration	date	name