


* 1 heat shrink tube is enclosed separately

Kabelzuschnitt
Stripping dimension

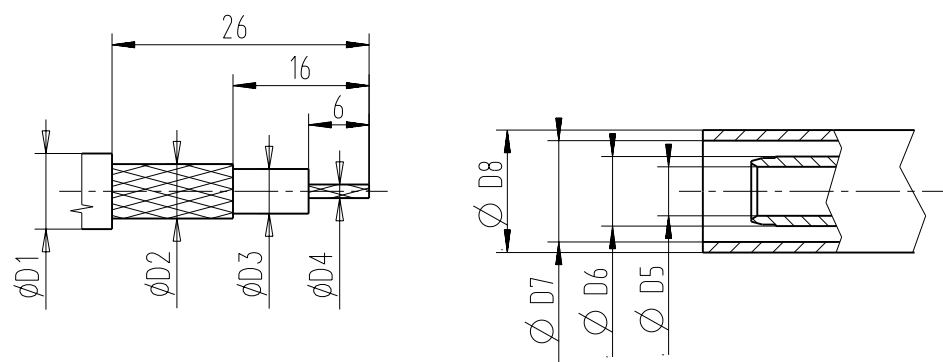

Fuer Kabel /
For cable

Gr.	Type Typ	$\phi D1$ max.	$\phi D2$ max.	$\phi D3$ max.	$\phi D4$ max.	$\phi D5$	$\phi D6$	$\phi D7$	$\phi D8$	Crimp Aussen/out	Innen/in
8	RG 214 /U	10,8	8,8	7,25	2,25	7,35	9,2	11,2	12,0	10,4	löten/ solder

IMS CONNECTOR
SYSTEMS

general tolerance
ISO 2768
mH


scale 2:1

Assembly instruction M222
Stripping dimension

date 06.11.06
name Schwaer

Kabelstecker

Cable mount plug KS 320



4222.VNS.1410.08'

Rev
a

nr	rev	alteration	date	name
EC_014_07	a	New pin	25.01.07	RSch