


Dichtung / gasket


Material and plating		
	Material	Plating
Outer contact	Brass	Cu2Ag3
Center contact	Brass	Cu2Ag5
Other metal parts	Brass	CuZnSn
Spring ring	Stainless steel	-
Insulator	PTFE	-
Gasket	Silicone	-

Steckbereich nach IEC 61169-54  
Mating area acc. IEC 61169-54

Kabelzuschnitt / stripping dimension  
Kabel / cable RG 402 /U

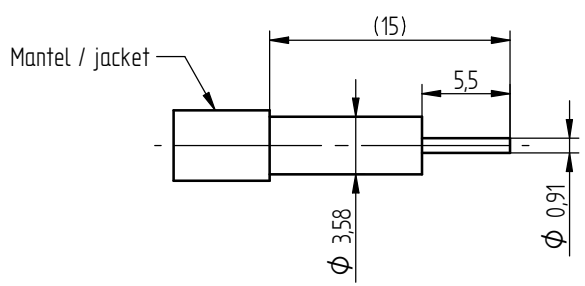

Montageanleitung /  
Assembling instruction:  
M-264

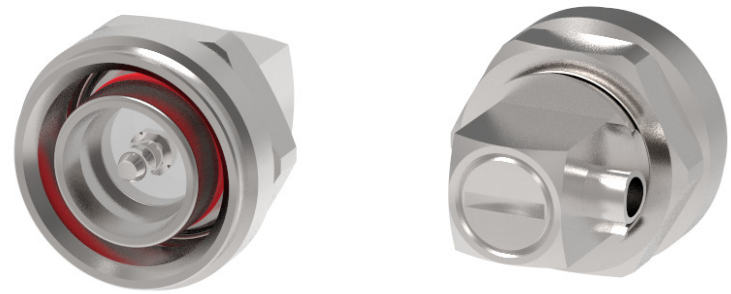

				general tolerance ISO 2768		scale: 3:1	
				date 21.04.15		name Schwaer	
				generate		Screw type	
				checked		4.3/10(m)-Kabelwinkelstecker	
Design d dia. 24,6 in max. 24,4				26.05.17	RSc	4.3/10(m)-Cable mount angle plug	
Design c Add. diameter				02.05.17	RSc		
Design b Add. table				26.04.17	RSc		
Design a Add. screw cap				28.06.16	RSc		
nr.	rev.	alteration	date	name			Rev. d