


Pos.	Stk./ pcs	Bezeichnung/ Description	Typ-Nr./ Type-No.	Bemerkung/ Remark
①	1	SMA-Kabelstecker rev. pol. SMA-Cable mount plug rev. pol.	5474.42.1412.213 (1077262)	
②	1	Kabel Cable	siehe Tabelle rechts! see chart on the right side!	
③				
④				
⑤				
⑥				
⑦				

②	Stk./ pcs.	Kabel / Cable	Kabel-Typ / Cable-type	Art.-Nr. IMS / Part No. IMS	Zuschnittlänge l / Cable-length l	Länge L2 / length L2	Länge L / length L
	0,5	K-3097-01	IPEX MHF4	(1128793)	261,6±3	259±5	270±5
	0,5	K-3097-02	IPEX MHF4	(1128795)	191,6±3	189±5	200±5
b	0,5	K-3097-03	IPEX MHF4	(1129415)	61,65±2	59±3	70±3

Anzahl der Kabel / No. of cable	Stück / Pcs
---------------------------------	-------------

Kabelzuschnitt / Stripping dimension

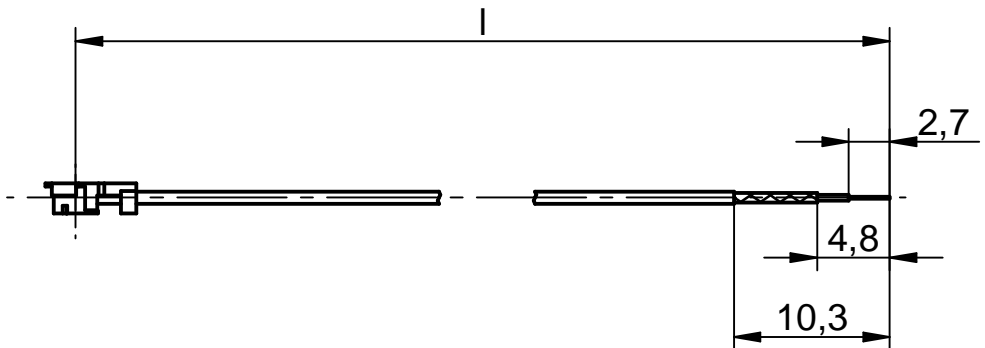


Pos.1 M-130
Aussen/outer: crimp \square SW 2,67
Innen/inner: löten/solder

Pos.2
Aussen/outer:
Innen/inner:


K-3097-01, K-3097-02

Prüfspannung: 500Veff/50Hz
Test-voltage: 500Veff/50Hz

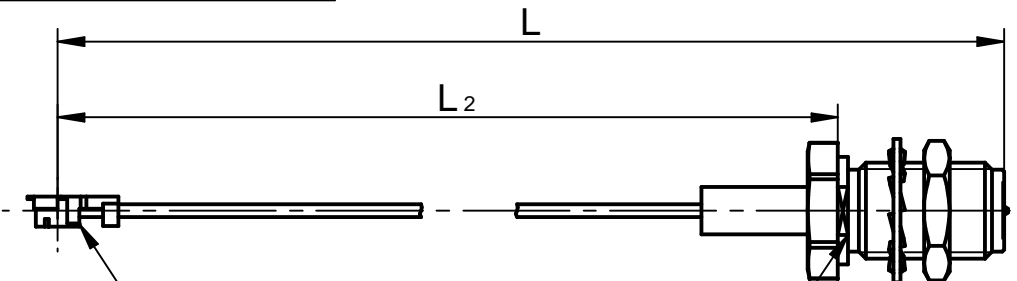

Lage beachten! / Look at position!
Pozícióra figyelni!

K-3097-03 c

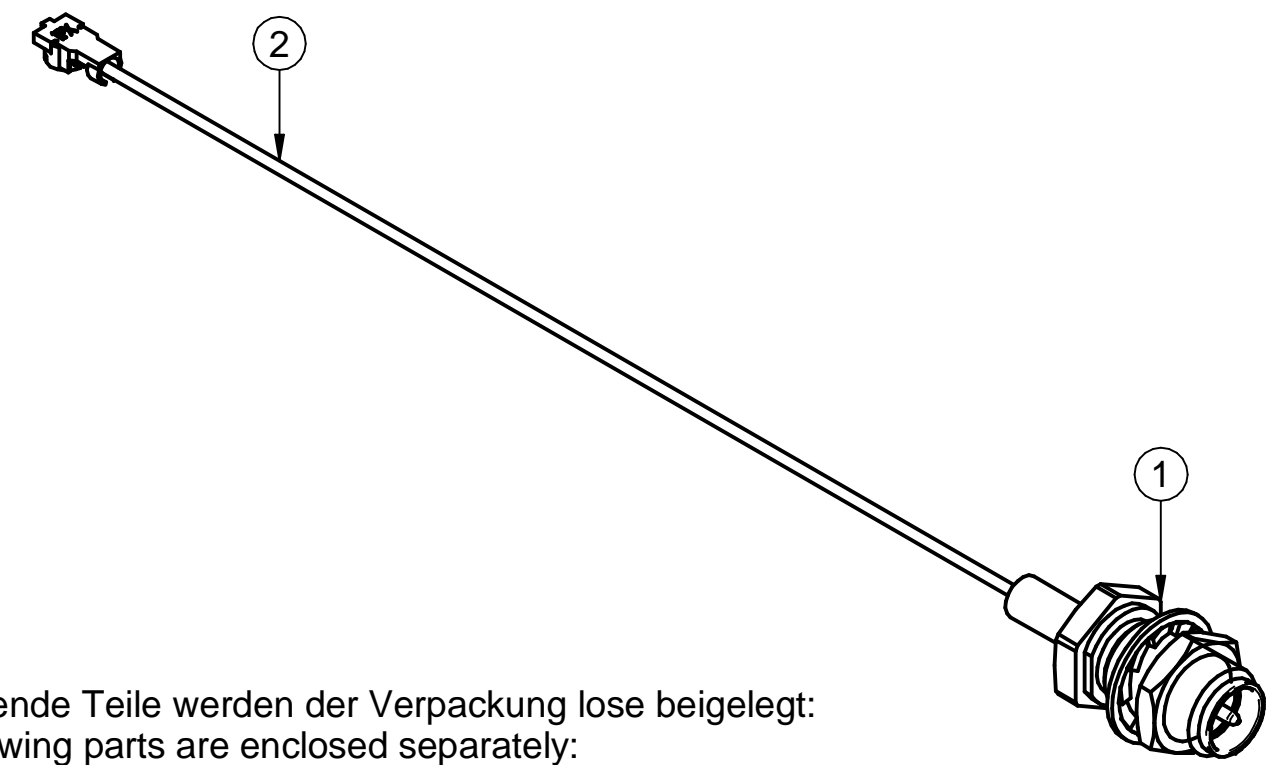

Folgende Teile werden der Verpackung lose beigelegt:
Following parts are enclosed separately:

Fächerscheibe/ Fan disk
Befestigungsmutter/ Coupling nut

IMS CONNECTOR SYSTEMS		general tolerance		scale: 2:1	
		AA-CS-12			
	date	name		HF-Leitung flexibel RF-flexible cable assembly	
generate	30.01.18	kpolgar			
checked	01.03.19	Pözl			
Norm					
EC_024_19	c	Pos 3 position changed	01.03.19	phalm	K-3097-XX
EC_094_18	b	New length added	02.10.18	kpolgar	
EC_021_18	a	New length added	02.03.18	kpolgar	
nr.	rev.	alteration	date	name	
					Rev. C